



# Galvanised Steel Wire Rope Pulley with Bracket (Model No. 164)

	SKU:	185-164-50	185-164-75	185-164-100	185-164-125	185-164-150
Load Capacity	(kg)	300	600	900	1100	1250
Sheave External Diameter Ø	(mm)	50	75	100	125	150
Groove Base Diameter Ø	(mm)	38	60	80	103	125
Groove Radius	(mm)	4.0	5.0	6.0	7.0	8.0
Groove Depth	(mm)	6	7.5	10	11	13
Rim Width	(mm)	12	18	21	22	24
Base Plate Width	(mm)	68	86	80	104	130
Base Plate Length	(mm)	65	75	100	120	145
Base Plate Thickness	(mm)	7	10	10	10	12
Fixing Hole Ø	(mm)	7	9	9	9	14
Hole Centre Distance (Axial Direction)	(mm)	50	60	65	80	90
Hole Centre Distance (Longitudinal Direction)	(mm)	55	55	80	90	120
Overall Height	(mm)	70	105	125	153	190
Height to Axle Pin Centre	(mm)	45	67	75	90	115
Rope Diameter Max Ø	(mm)	6	8	9	10	12
Weight	(kg)	0.4	0.8	1.4	1.8	2.5

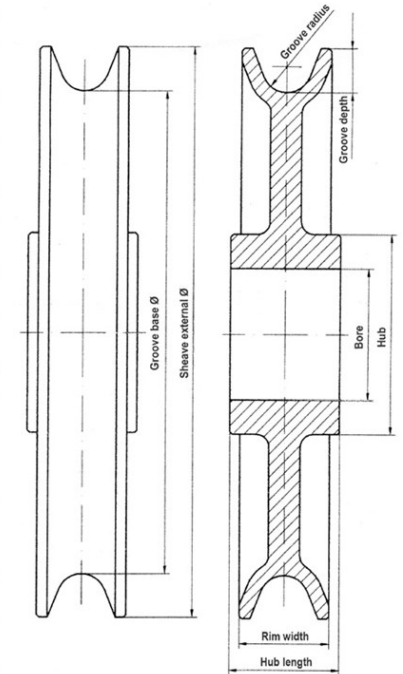

Loading capacity = 100%

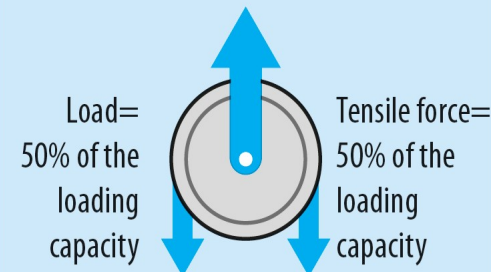

ORPTECH 



POWERED BY ORPLEX

For guidance only – verify suitability before use. E&OE.

V1-26