



Galvanised Steel Wire Rope Pulley with Bracket (Model No. 174)

	SKU:	185-174-50	185-174-75	185-174-100	185-174-125	185-174-150	185-174-200	185-174-250	185-174-300
Load Capacity	(kg)	300	600	900	1100	1250	2000	3200	5000
Sheave External Diameter Ø	(mm)	50	75	100	125	150	200	250	300
Groove Base Diameter Ø	(mm)	38	59	80	103	126	166	213	257
Groove Radius	(mm)	3.2	4.2	4.8	5.3	6.5	5.3	6.5	8.5
Groove Depth	(mm)	6	8	10	11	12	17	18.5	21.5
Rim Width	(mm)	12	18	21	21	22	32	36	40
Base Plate Width	(mm)	68	86	89	104	119	130	160	170
Base Plate Length	(mm)	65	75	100	120	146	200	230	240
Base Plate Thickness	(mm)	4	6	6	6	8	8	12	12
Fixing Hole Ø	(mm)	7	9	9	14	14	14	18	18
Hole Centre Distance (Axial Direction)	(mm)	50	50	65	74	89	100	120	130
Hole Centre Distance (Longtudinal Direction)	(mm)	50	60	80	90	120	170	190	200
Overall Height	(mm)	70	105	126	158	190	245	305	338
Height to Axle Pin Centre	(mm)	45	67	76	95	115	145	180	188
Hub Diameter Ø	(mm)	55	60	80	100	150	150	200	200
Rope Diameter Max Ø	(mm)	6	8	9	10	12	10	12	16
Weight	(kg)	0.4	1.0	1.4	2.4	2.5	16	22	30

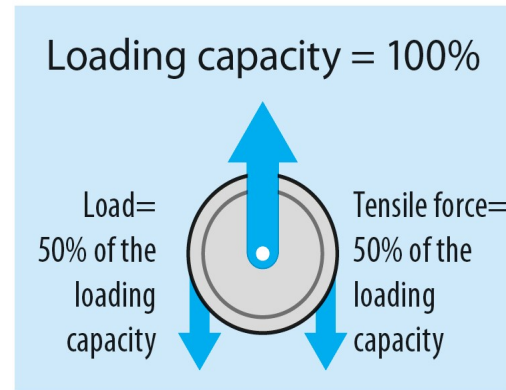

ORPTECH 

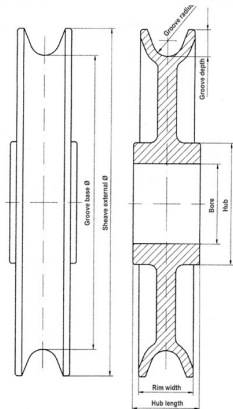

POWERED BY ORPLEX

For guidance only – verify suitability before use. E&OE.

V1-26